

INSTRUCTIONS FOR: 3-LEVEL COMPOSITE WORKSHOP TROLLEY MODEL NO. CX309

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS TROLLEY CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1. GENERAL SAFETY

- WARNING! Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this trolley.
- x DO NOT overload the trolley see 2. DESCRIPTION.
- x DO NOT drop loads on to shelves.
- x DO NOT place hot (above 100°C) items on to shelves.
- ✓ Load shelves with the heaviest items on the lower shelves.
- Use the trolley in a suitable work area.
- Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Keep the trolley clean and tidy in accordance with good workshop practice.
- **DO NOT** use the trolley for any purpose other than that for which it is designed.
- x **DO NOT** stand on the trolley, use it as a ladder or allow others to ride on the trolley.
- Use the wheel locks to prevent the trolley from inadvertently moving.
- x DO NOT leave unattended, especially when loaded, unless the wheels are locked, chocked or the trolley otherwise secured.
- x DO NOT use trolley on uneven ground and DO NOT run over curbs or steps use a ramp.
- x DO NOT use trolley if any part is significantly damaged, paying particular attention to the wheels.
- √ Keep children and unauthorised persons away from the work area.



2. DESCRIPTION

Composite garage, workshop, or janitorial trolley with each shelf having a capacity of 40kg. Three shelves with shallow edge retaining walls on three sides and flush on one side for ease of adding or removing items. Two ergonomic and aesthetically styled operator handles. Four low friction Ø100mm swivel castors, two free and two locking.

3. TECHNICAL SPECIFICATIONS

Overall size:	750 x 460 x 980mm
Shelf size:	625 x 420mm
Shelf capacity:	40kg/level

4. CONTENTS

Carefully unpack the product and check the contents against the diagram and parts list below. Should any items be missing or damaged contact your Sealey dealer.

Description	Quantity	Description	Quantity	Description	Quantity	Description	Quantity
	2		8		2	Spanner for castor Screw for handle	1.
Shelf (top and middle)		Corner post		Castor	1		4
					= c	Washer for handle	4
Bottom shelf (for castors)	2	Castor (locking)	2	Washer for castor	4		

5. ASSEMBLY

- **5.1** Assemble on a bench protecting against scratches, following sequence in fig1.
- 5.1.1 Fit four corner posts to middle and bottom shelf.
- 5.1.2 Fit two handles to top shelf with supplied screws.
- 5.1.3 Fit all three shelves to corner posts.
- 5.1.4 Fix 4 castors and tighten with provided spanner.
 Orientation Note! Shelves have one flush edge and three retaining edges. The flush edge is the loading edge.

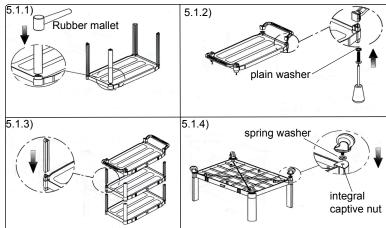


fig1.


NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group, Kempson Way, Suffolk Business Park, Bury St. Edmunds, Suffolk, IP32 7AR





www.sealey.co.uk

CX309 | Issue: 1 - 01/10/12

🛅 01284 703534 🛛 📷 sales@sealey.co.uk