

INSTRUCTIONS FOR:

## FLUID TRANSFER PUMP

MODEL No : TP501

Thank you for purchasing a Sealey Product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

## 1. SAFETY INSTRUCTIONS


- WARNING! DO NOT operate using flammable liquids in a confined space, the area should have adequate ventilation.
- ✓ If pumping flammable liquids, avoid proximity to naked flames or welding operations.
- ✓ Wear appropriate protective clothing when pumping solvents. We recommend eye/face and hand protection, available from your authorised Sealey dealer.
- ✓ Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
- ✓ Ensure spillages are dealt with immediately. Failure to do so could lead to personal injury or damage to the environment and possible prosecution by the authorities.
- ✓ Keep children away from areas where solvents are being used.

## 2. SPECIFICATION

Brass constructed pump suitable for syphoning a variety of fluids including oils, coolants, transmission fluid, diesel and antifreeze. Fitted with removable neoprene end caps. Supplied with 1m x 6mm intake hose and 600mm x 12mm discharge hose. Ideal for draining gearboxes and differentials. Delivers approximately 100ml per stroke.

## 3. ASSEMBLY / OPERATION

- 3.1 Insert the 600x12mm discharge hose to the outlet (fig.1A).
- 3.2 Insert the 1000x6mm intake hose to the inlet (fig.1B).
- 3.3 Ensure the discharge hose is placed into a container suitable for the substance and quantity to be transferred.
- 3.4 Raise and compress the handle (fig.1C), fluid should begin to flow after 3 strokes.

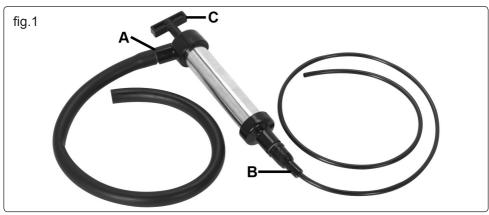

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group, Kempson Way, Suffolk Business Park, Bury St. Edmunds, Suffolk, IP37 7AR





A 01284 703534